



SURVEILLANCE & ENTRANCE PRODUCTS



CCTV
PRODUCTS



ENTRANCE
PRODUCTS



UHF
READER



RFID
CARDS



ACCESS
CONTROL



+91 9599536275, 9811860835



support@spyvisioncctv.com



<https://spyvisioncctv.com/>




Karan International
Shop No 763 Old Lajpat Rai Market,
Chandni Chowk, Delhi-110006

Spy Vision CCTV


ABOUT US

Automation , we believe in quality and deliveries , we want to make sure that our associates break all barriers and bring new revolution in the industry with dynamic product range .

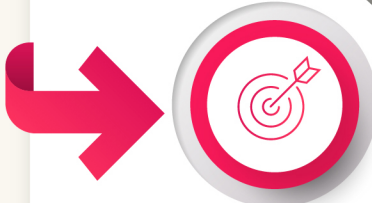


Mission

“Our aim is to make all Surveillance and Entrance Products in INDIA and working in the same direction , will do new wonders in the industry ASAP with our partner’s support.”

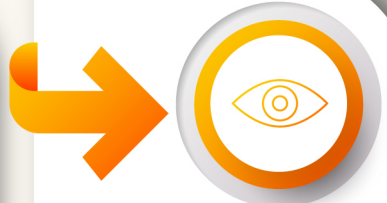

Vision

“We want to grow with happy customers , therefore will make our best products and deliver the same”

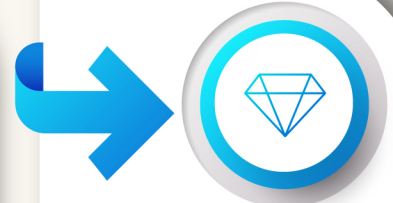

Belive

“Always believe in feedback and act on the same.”



Biometric Attendance Systems

Features:

- Easy handling
- Power efficient
- Longer life working
- Easy to use
- Easy to install



Electronic Door Locks

Features:

- It is water resistant electric door lock and its support video door phone and access control system
- it is Heavy Duty Electronic door lock:- vandal proof metal housing
- Voltage :- 12V DC/AC , Minimum Current :- 1A , working Mode:- power to unlock and fail secure unlocking mode:- electric, push button, keys



Video Door Phone

Features:

- View and Speak to Visitors before you let them into your premises
- Protects you from unwelcome and unexpected bogus callers
- You have the control over their access to your home or premises

IP Indoor Camera



SVC-104514PDC

4MP IP Color View Indoor Camera

- 1/2.8" low illumination CMOS sensor
- 4MP HD Resolution
- 3.6mm fixed lens
- 2 Warm Led & 2 IR Range upto 15 to 20 mtr



SVC-104515PDC

5MP IP Color View Indoor Camera

- 1/2.8"IMX Low illumination CMOS sensor
- 5MP HD Resolution
- 3.6mm fixed lens
- 2 Warm Led & 2 IR Range upto 15 to 20 mtr



SVC-104518PDC

8MP IP Indoor Color View Camera

- 1/3" low illumination CMOS sensor
- 8MP HD Resolution
- 3.6mm fixed lens
- 2 Warm Led & 2 IR Range upto 15 to 20 mtr

IP Outdoor Camera



SVC-204514PDC

4MP IP Outdoor Color View Camera

- 1/2.8 " low illumination CMOS sensor
- 4MP HD Resolution
- 3.6mm fixed lens(6mm Optional)
- 2 Warm Led & 2 IR Range upto 25 to 30 mtr



SVC-204615PDC

5MP IP Outdoor Color View Camera

- 1/2.8 " low illumination CMOS sensor
- 5MP HD Resolution
- 3.6mm fixed lens(6mm Optional)
- 2 Warm Led & 2 IR Range upto 25 to 30 mtr



SVC-204718PDC

8MP IP Outdoor Color View Camera

- 1/2.8 " low illumination CMOS sensor
- 8MP HD Resolution
- 3.6mm fixed lens(6mm Optional)
- 2 Warm Led & 2 IR Range upto 25 to 30 mtr

HD Indoor Camera



SVC-1010A2P

2.4MP HD Indoor Camera

- 1/2.8" CMOS sensor
- 2.4MP HD Resolution
- 3.6mm fixed lens
- 18 smart IR Range upto 15 to 20 mtr
- [CE,RoHS Certified]



SVC-1042A2PC

2.4MP HD Indoor Color View Camera

- 1/2.8" low illumination CMOS sensor
- 2.4MP HD Resolution
- 3.6mm fixed lens
- 2 warm Led Range upto 15 to 20 mtr
- Night coloview Vision
- Inbuilt Mic
- [CE,RoHS Certified]



SVC-1042A5PC

5MP HD Indoor ColorView Camera

- 1/3" low illumination CMOS sensor
- 5MP HD Resolution
- 3.6mm fixed lens
- 2 warm Led Range upto 15 to 20 mtr
- Night coloview Vision
- Inbuilt Mic
- [CE,RoHS Certified]

HD Outdoor Camera



SVC-1043A5PC

2.4MP HD Outdoor True View Camera

- 1/2.8" CMOS sensor
- 2.4MP HD Resolution
- 3.6mm fixed lens



SVC-1043A2PC

2.4 MP HD Outdoor ColorView Camera

- 1/2.8" low illumination CMOS sensor
- 2.4MP HD Resolution
- 3.6mm fixed lens
- 2 warm Led Range upto 15 to 20 mtr



SVC-1043A5PC

2.4 MP HD Outdoor Color View Camera

- 1/2.8 " low illumination CMOS sensor
- 2.4MP HD Resolution
- 3.6mm fixed lens

VERIFOVAL CAMERA



SVC-208514

4MP IP Outdoor Camera (60mtr)

- 1/2.8" low illumination CMOS sensor
- 4MP HD Resolution
- 2.8mm to 12mm verifocal lens(8/16mm optional)
- 36 Smart IR Range upto 50 to 60 mtr



SVC-208515

5MP IP Outdoor Camera (60mtr)

- 1/2.8" low illumination CMOS sensor
- 5MP HD Resolution
- 2.8mm to 12mm verifocal lens(8/16mm optional)
- 36 Smart IR Range upto 50 to 60 mtr



SVC-208518

8MP IP Outdoor Camera (60mtr)

- 1/2.8" low illumination CMOS sensor
- 8MP HD Resolution
- 2.8mm to 12mm verifocal lens(8/16mm optional)
- 36 Smart IR Range upto 30 to 40 mtr

PTZ CAMERA



SVC-2M-SDA-25X

2MP IP PTZ

- 2MP IP-CMOS SENSOR
- IR Distance up to 150M
- Resolution : 2MP(1920X1080)
- 25X , f=5.5mm~110mm
- Power : DC12V



SVC-5M-SDA-30X

5MP IP PTZ

- 5MP IP-CMOS SENSOR
- IR Distance up to 200M
- Resolution : 5MP(2560X1440)
- 25X , f=4.7mm~141mm
- Power : DC12V



SVC-4M-SD-WIFI

4MP WiFi PTZ

- 1/2.9" CMOS Sensor (2.0MP)
- WiFi, P2P, Web support
- Pan-Tilt, Microphone, speaker, SD card supported
- Motion detecting

WIFI / 4G CAMERA



WIFI DOME / BULLET

104814-4G/204814-4G

- 1/3" Image Sensor (4.0 MP)
- 3.6 mm Fixed Lens
- Mic, Speaker, SD Card 128GB
- WiFi, P2P, Web Support, onvif



WIFI DOME / BULLET

104814-WIFI/204814-WIFI

- 1/3" Image Sensor (4.0 MP)
- 3.6 mm Fixed Lens
- Mic, Speaker, SD Card 128GB
- All 4G Sim Card Supported,
- P2P, Web Support, onvif



4G Router

- Support 4G SIM
- Wireless Monitoring & IOT
- Power Supply 12V DC
- 10/100 Rj-45 Lan Port
- High Stable Signal
- All SIM Supported
- 3 Omni Antenna 5dbi

ANPR CAMERA



SVC-2M-ANPR

2MP/4MP, Capture Speed Range 0~70km/h
 Image Sensor: 1/2.8" CMOS, Electronic Shutter: 1/25 S ~ 1/100000s,
 Lens: 2.8~12mm@F1.4, motorized and 7~22mm@F1.6, motorized,
 Wide Dynamic Range: 120dB, Smart H.265 / H.265+/H.265/Smart
 H.264/H.264+/H.264/MJPEG60Hz : 1080P/720P (1~30fps) ;
 HER Mode: 1080P/720P (60Hz: 1~60fps; 50Hz: 1~50fps)
 50Hz : 1080P/720P.(~25fps), Intelligent Analytics Video tampering
 detection, scene change detection, license plate recognition,
 Snapshot Overview and cutout of plate for picture,
 White List 10000, Power Supply DC12V/PoE



SVC-4M-ANPR

NVR (Network Video Recorder)



SVC-10NVR-1H, 9CH NVR 1HDD

Bandwidth:50Mbps
 Live Preview Capability:Up to 9 ch * 8MP/ 5MP/ 4MP/3MP/2MP
 Support Ultra 265 intelligent coding technology
 Support 1 x HDMI , 1 x VGA output
 Support 1 x SATA Hard Disk Max 10TB
 Support Two-way audio;



SVC-16NVR-1H 16CH NVR 1HDD

Bandwidth:64Mbps
 Live Preview Capability:Up to 16 ch * 8MP/ 5MP/ 4MP/3MP/2MP
 Support Ultra 265 intelligent coding technology
 Support 1 x HDMI , 1 x VGA output
 Support 1 x SATA Hard Disk Max 10TB
 Support Two-way audio;



SVC-32NVR-2H 32CH NVR 2HDD

Bandwidth:160Mbps
 Live Preview Capability:Up to 32 ch * 8MP/ 5MP/ 4MP/3MP/2MP
 Support Ultra 265 intelligent coding technology
 Support 1 x HDMI , 1 x VGA output
 Support 2 x SATA Hard Disk Max 10TB Each
 Support Two-way audio;



SVC-64NVR-8H 64CH NVR 8HDD

64CH 4K NVR: OS Embedded Linux
 Standard : H.265, H.264,12MP/ 8MP/ 6MP/ 5MP/ 4MP/3MP/1080P/1280×1024/960P/ 720P/960H/D1/CIF, Dual stream recording,
 SATA×8, up to 8TB per HDD, E-SATA×2, RAID0, RAID1, RAID5, RAID6, RAID10,
 Mobile Device iOS, Andriod

HD DVR/XVR



SVC-4XVR-1H 4CH XVR 1HDD

Support up to 5MP
 Support AHD/TVI/CVI/CVBS Self-adaptive
 Support WEB, CMS Platform
 Support Mobile Phone Monitoring
 Support 1 x HDMI , 1 x VGA output
 Support 1 x SATA Hard Disk Max 6TB



SVC-8XVR-1H 8CH XVR 1HDD


Support up to 5MP
 Support AHD/TVI/CVI/CVBS Self-adaptive
 Support WEB, CMS Platform
 Support Mobile Phone Monitoring
 Support 1 x HDMI , 1 x VGA output
 Support 1 x SATA Hard Disk Max 6TB



SVC-16XVR-1H 16CH XVR 1HDD

Support up to 5MP
 Support AHD/TVI/CVI/CVBS Self-adaptive
 Support WEB, CMS Platform
 Support Mobile Phone Monitoring
 Support 1 x HDMI , 1 x VGA output
 Support 1 x SATA Hard Disk Max 6TB

P2P



SVC-P2P-150-M

wireless transmission upto 500m
 Works on 2.4 GHZ frequency
 Transmission Speed of 150 Mbps
 Power DC 12v & 24v POE
 Transmitter power 19 dbm
 Anteena gain 12 dbi
 W/P Standard IP-66



SVC-P2P-350-L

wireless transmission upto 2 km
 Works on 5.8 GHZ frequency
 Transmission Speed of 300 Mbps
 Power DC 12v & 24v POE
 Transmitter power 23 dbm
 Anteena gain 17 dbi
 W/P Standard IP-66



SVC-P2P-450-XL

wireless transmission upto 4 km
 Works on 5.8 GHZ frequency
 Transmission Speed of 300 Mbps
 Power DC 12v & 24v POE
 Transmitter power 27 dbm
 Anteena gain 19 dbi
 W/P Standard IP-66

PoE Switches



SVC-400P-2UP 4+2 PORT POE SWITCH

- 4Nos 10/100 PoE Ports
- 2Nos 10/100 RJ45 Uplink port
- 96W total Power Budget
- 1.2G Switching Capacity
- 250m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



SVC-400P-2UPG 4+2 PORT (GIGA UPLINK) POE SWITCH

- 4Nos 10/100 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 96W total Power Budget
- 4.8G Switching Capacity
- 250m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



SVC-4000P-2UPG 4+2 PORT (FULL GIGA) POE SWITCH

- 4Nos 10/100/1000 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 96W total Power Budget
- 12G Switching Capacity
- 100m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



SVC-800P-2UP 8+2 PORT POE SWITCH

- 8Nos 10/100 PoE Ports
- 2Nos 10/100 RJ45 Uplink port
- 120W total Power Budget
- 2G Switching Capacity
- 250m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



SVC-800P-2UPG 8+2 PORT (GIGA UPLINK) POE SWITCH

- 8Nos 10/100 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 120W total Power Budget
- 5.6G Switching Capacity
- 250m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



SVC-8000P-2UPG 8+2 PORT (FULL GIGA) POE SWITCH

- 8Nos 10/100/1000 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 120W total Power Budget
- 20G Switching Capacity
- 100m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



SVC-8000P-2F-2UPG 8+2+2 PORT (FULL GIGA WITH SFP) POE SWITCH

- 8Nos 10/100/1000 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 2Nos 10/100/1000 SFP Uplink port
- 120W total Power Budget
- 24G Switching Capacity
- 100m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



SVC-1600P-1F-2UPG 16+2+1 PORT (GIGA Uplink WITH SFP) POE SWITCH

- 16Nos 10/100 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 1Nos 10/100/1000 SFP Uplink port
- 300W total Power Budget
- 9.2G Switching Capacity
- 250m Max transmission distance
- IEEE 802.3af, IEEE 802.3at



SVC-2400P-2F-2UPG 24+2+1 PORT (FULL GIGA WITH SFP) POE SWITCH

- 24Nos 10/100/1000 PoE Ports
- 2Nos 10/100/1000 RJ45 Uplink port
- 2Nos 10/100/1000 SFP Uplink port
- 300W total Power Budget
- 38G Switching Capacity
- 100m Max transmission distance
- IEEE 802.3af, IEEE 802.3at

10/100/1000 Media Converters



SVC-MC1312-20
10/100/1000M SM Dual Fiber,
1310nm, SC, 20Km



SVC-MC8512-02
10/100/1000M MM Dual Fiber,
850nm, SC, 2Km



SVC-SMCBI3512-20 / SVC-MCBI5312-20
10/100/1000M SM Single Fiber,
T1310/1550nm, SC, 20Km

SMPS



SVC-4SMPS
4Port SMPS 12v 5amp



SVC-8SMPS
8Port SMPS 12v 7.5amp




SVC-16SMPS
16Port SMPS 12v 15amp

CAT6 OUTDOOR




SVC-MC1312-20
 WEATHER PROOF DOUBLE JACKET
 EC GRADE COPPER
 42 MICRON ALUMINIUM FOIL
 INTERNATIONAL STANDARD TWISTING
 DCM TESTED
 FLUKE TESTED
 F.R FRESH HIGH QUALITY PVC

CAT6 INDOOR




SVC-MC1312-20
 Cat6 Indoor
 EC GRADE COPPER
 FR FRESH PVC
 DCM TESTED
 FLUKE TESTED
 F.R FRESH HIGH QUALITY PVC

CAT6 ARMoured



SVC-MC1312-20
 HEAVY 0.557 COPPER GAUGE
 EC GRADE COPPER
 0.8 MM ALUMINIUM ROD
 OUTER LD PVC
 DCM TESTED
 FLUKE TESTED
 F.R FRESH HIGH QUALITY PVC

FIBER CABLE



SVC-MC1312-20
 OPTICAL FIBER (FRP & ARMoured)
 GOOD QUALITY HDPE
 HIGH QUALITY GLASS MATERIAL
 HIGH DATA SIGNAL PASSING CABLE
 WITH OTDR REPORT
 CORE 2 TO 96 CORE AVAILABLE
 IN FRP, FRP WITH YARN & ARMoured

CAT6 Patch Cord



AVAILABLE IN 2MTR, 3MTR & 5MTR
 AVAILABLE IN STANDARD PACKING

3+1 CCTV Cable



F.R FRESH PVC
 EC GRADE COPPER
 HIGH PERFORMANCE
 CCTV CABLE

SFP 1G (DUAL FIBER)



SVC-7512-02D
 SFP, 1.25G, 850NM,
 500M, MMF, DDM



SVC-7512-20D
 SFP, 1.25G, 1310nm,
 20km, SMF, DDM



SVC-7512-40D
 SFP, 1.25G, 1550NM,
 40KM, SMF, DDM

SFP 1G BIDI



SVC-BI5612-20D
 SFP, BIDI, 1.25G, 1310/1550NM,
 20KM, SMF, DDM
SVC-BI6512-20D
 SFP, BIDI, 1.25G, 1550/1310NM,
 20KM, SMF, DDM



SVC-BI5612-40D
 SFP, BIDI, 1.25G, 1310/1550NM,
 40KM, SMF, DDM
SVC-BI6512-40D
 SFP, BIDI, 1.25G, 1550/1310NM,
 40KM, SMF, DDM

SFP+ 10G BIDI



SVC-BI4396-20
 SFP+, 10G, BIDI, 1270/1330NM,
 20KM, SMF, DDM
SVC-BI3496-20
 SFP+, 10G, BIDI, 1330/1270NM,
 20KM, SMF, DDM



SVC-BI4596-40
 SFP+, 10G, BIDI, 1270/1330NM,
 40KM, SMF, DDM
SVC-BI5496-40
 SFP+, 10G, BIDI, 1330/1270NM,
 40KM, SMF, DDM